



CAME


**GATE
OPERATORS**

FERNI

RESIDENTIAL COLUMN-MOUNT
SWING GATE OPERATOR



Versatile Solution for Residential Swing Gates

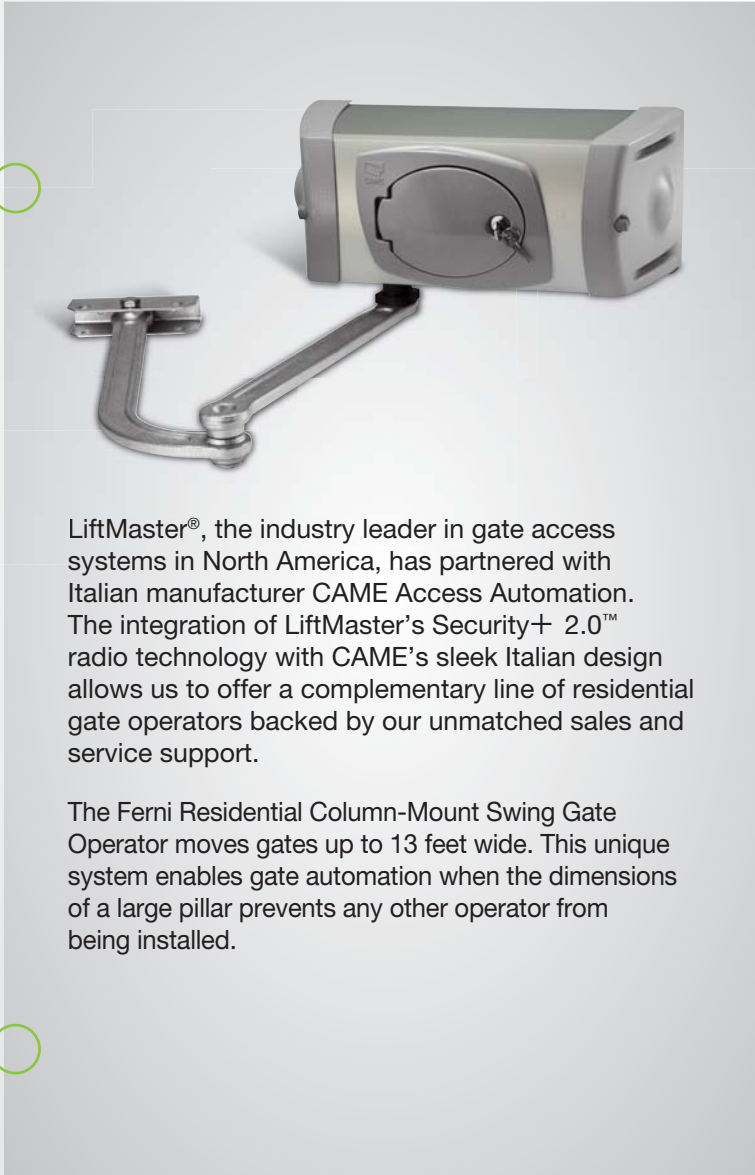

LiftMaster®, the industry leader in gate access systems in North America, has partnered with Italian manufacturer CAME Access Automation. The integration of LiftMaster's Security+ 2.0™ radio technology with CAME's sleek Italian design allows us to offer a complementary line of residential gate operators backed by our unmatched sales and service support.

The FERNI Residential Column-Mount Swing Gate Operator moves gates up to 13 feet wide. This unique system enables gate automation when the dimensions of a large pillar prevents any other operator from being installed.

The compact FERNI offers full-sized features:

LiftMaster® Security+ 2.0™ radio technology
2X the range of standard receivers

On-board receiver provides a single remote solution for gate and garage access

Compact articulating arm mounts neatly on column or fence post

Can be mounted at top, middle or bottom of gate

24V DC motor with soft stop moves a 13 ft. gate up to 1,770 lbs.

Adjustable speed control moves gate with precision

Simple manual disconnect for emergency operation

Timer-to-Close automatically closes the gate after preset time

Available Q4 2012

LiftMaster®



CAME | GATE OPERATORS

FERNI

RESIDENTIAL COLUMN-MOUNT SWING GATE OPERATOR

Specifications

Power: 120V AC, single phase

Motor power:
24V DC continuous duty

Accessory power output:
24V AC, 2 amps

Receiver: Security+ 2.0™, holds 50 transmitters, HomeLink® compatible*

Surge suppression: On high and low voltage inputs

Operator duty cycle rating:
25 cycles per day

Gate travel speed: 90-degree opening adjustable in 12-45 seconds

Temperature specifications:
-4°F to 131°F (-20°C to 55°C)

Warranty: 3 years for residential applications

*May require an external adapter depending on the make, model and year of your vehicle. Visit www.homelink.com for additional information.

Construction

Cover: UV-resistant plastic


Operator motor casing:
Aluminum

Shipping weight:
FERNI 1PKG: 48 lbs.
FERNI-S: 32 lbs.

ETL listed: Compliant with UL-325 and CSA C22.2 No. 247 standards

IMPORTANT: To be compliant with UL-325 and industry safety guidelines, qualified secondary entrapment devices such as photo-eyes or sensing edges are required to be installed with this gate operator.

Recommended Capacities

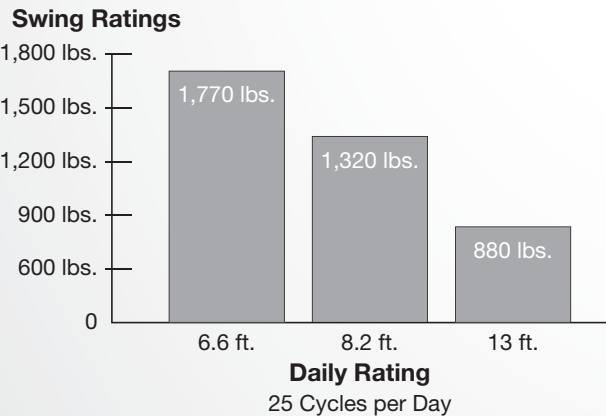

LiftMaster®

THE CHAMBERLAIN GROUP, INC.
845 Larch Avenue
Elmhurst, IL 60126
LiftMaster.com/CAME

Add to Your System



DIR10M: CAME thru-beam photo-eyes, 32.8' sensing distance, NC contact



DIRL: CAME extruded 16.5" aluminum photo-eye mounting post with base



DIRZ: CAME photo-eye aluminum alloy impact cover



LD7LP: LiftMaster® low-power loop detector



893MAX: LiftMaster® 3-button premium Security+ 2.0™ remote control



890MAX: LiftMaster® 3-button mini Security+ 2.0™ remote control




TAC1: LiftMaster® telephone entry system



EL25: LiftMaster® telephone entry system

Dimensions

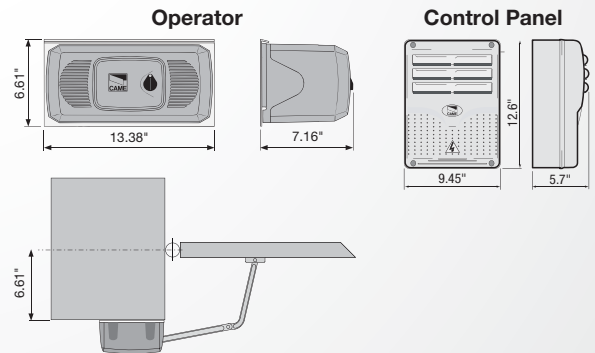

LMCMCAFERN
Printed in U.S.A. 07/12
©2012 The Chamberlain Group, Inc.



Follow us on Facebook, Twitter and YouTube!

