

PR-24 **Plus** and OV-25 **Plus**



OV-25
Short panel stamp with optional Stockton design trim insert.



Long panel stamp with optional Waterton design trim insert.

Prestige Plus

Delden's premium low maintenance doors are engineered to last. Choose from three different panel designs to create the steel garage door that enhances the beauty of your home. The *Prestige Plus* provides a heavier gauge steel with elegant "colonial style" embossments in a variety of colors. The *Ovation Plus* features elegant, contemporary styling at an economical price.

Ovation Plus

Enhanced safety features create a safe, secure and beautiful complement to your home.



"Experience the Quality"



Prestige Plus – Ovation Plus

- Delden’s section interfaces are designed to reduce the risk of serious finger and hand injuries.
- All quality Delden hardware is hot-dip galvanized, including adjustable track, hinges, top and bottom fixtures and preformed aircraft-quality cable. Torsion and extension spring wire is tempered for long cycle life.
- Door sections are furnished with a baked-on polyester top coat over hot-dip galvanized steel.

- “Ruf-Tex” woodgrain finish simulates the beauty of real wood.
- Continuous U-shaped weatherstrip, applied to heavy-duty G-60 galvanized steel bottom retainer, conforms to out-of-level conditions and seals against inclement weather.
- Low-maintenance “finish” paint coating, available in 10 colors.
- Keyed lock system optional.

OPTIONS



SERIES 1000

Single-Layer: Steel

- Heavy-Duty Exterior Steel
- Durable, Reliable, Low Maintenance




SERIES 2000

Double-Layer: Steel + Insulation


- Heavy-Duty Exterior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Insulation with Vinyl Backing
- Energy Efficient

DELDEN DESIGN TRIM INSERTS

SHORT PANEL

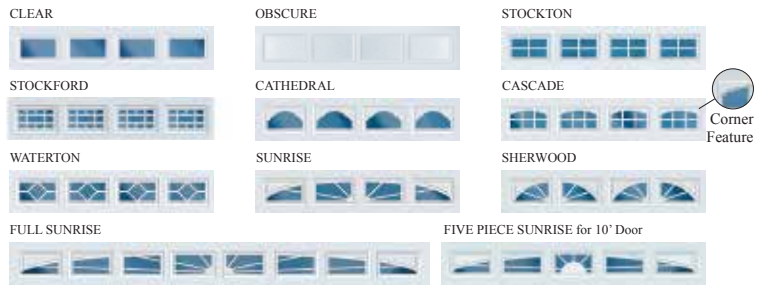

LONG PANEL

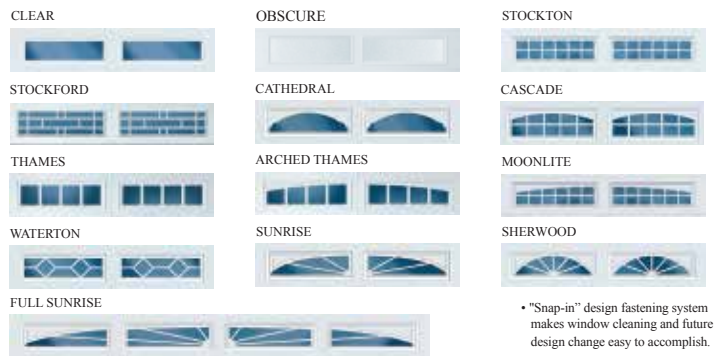

• “Snap-in” design fastening system makes window cleaning and future design change easy to accomplish.

• 3/32” Single Strength Glass

Available Door Widths	Number of Panels Available for Window Installation	
	Short Panel Design	Long Panel Design
8', 9'	4	2
10'	5	2
12'	6	3
15'	6	4
16', 18'	8	4

PR-24 Plus is available in heights from 6' - 14' in 3” increments (except 7'3”)
 OV-25 Plus is available in heights from 6' - 14' in 3” increments (except 7'3”)

COLORS

Delden steel doors arrive pre-painted; for custom colors, exterior latex paint must be used. Ask your Delden dealer for instructions on painting.



Refer to Exterior Color Options Chart

Delden reserves the right to change specifications and designs without notice and without incurring obligations. Some graphics and details provided courtesy of Entrematic and used by permission.

Proudly Distributed By:

	PR-24 Plus Series 1000	PR-24 Plus Series 2000	OV-25 Plus Series 1000	OV-25 Plus Series 2000
Panel				
Short	✓	✓	✓	✓
Long	✓	✓	✓	✓
Flush	✓	✓	✓	✓
Door Thickness	2"	2"	2"	2"
Insulation	N/A	1 1/2" Polystyrene (R Value = 6.84)	N/A	1 1/2" Polystyrene (R Value = 6.84)
Steel Thickness	24 ga	24 ga	25 ga	25 ga
Wind Load Available!	✓	✓	✓	✓
End Stiles				
Galvanized	N/A	N/A	✓	✓
Painted	✓	✓	N/A	N/A
Exterior Color Options				
True White	✓	✓	✓	✓
Almond	✓	✓	✓	✓
Sandtone	✓	✓	✓	✓
Wicker Tan	N/A	N/A	✓	✓
Terratone	N/A	N/A	✓	✓
Dark Brown	✓	✓	✓	✓
Black ^{2*}	✓	✓	N/A	N/A
Woodgrain				
Golden Oak ²	✓	✓	✓	✓
Walnut ²	✓	✓	✓	✓
Mahogany ²	✓	✓	✓	✓
Warranty				
Paint Finish	Lifetime	Lifetime	15 Years	25 Years
Hardware	3 Years	4 Years	1 Year	2 Years

¹ It is your responsibility to make sure your garage door meets local building codes.

² Price upcharge applies.

* A Black garage door is not recommended for houses facing southwest and subject to extreme sun/heat exposure.

KANSAS CITY, MISSOURI



WIND LOAD APPROVED DOORS AVAILABLE



"Experience the Quality"

www.deldenmfg.com

©2018 Rev6/18