











Delden's aluminum doors are constructed of 2" thick extruded aluminum rails and stiles and can be fitted with solid aluminum panels or a variety of full-view glass options. Perfect for automotive showrooms and repair centers, service stations, car washes, fire houses, restaurants, and sports complexes; our aluminum doors create a clean style for any facility. These doors can be installed as stationary mount or operative as a stylish alternative for indoor/outdoor environments.




NEW! The ClearView Aluminum Strut System provides added strength and durability to larger Model SSD-3550 without restricting viewing area. Included as standard for doors 16' 4" to 24' 2".

Construction

SSD-3500/SSD-3550


Model SSD-3500 - Medium Duty Aluminum Door Model SSD-3550 - Heavy Duty Aluminum Door

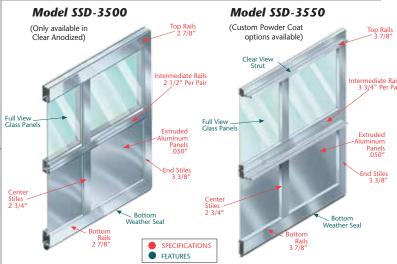

Specifications	SSD-3500	SSD-3550
Aluminum Thickness	6063-T5	6063-T5
R - Value	N/A	N/A
Maximum Standard Height	12'	18'
Maximum Standard Width	12'-2"	24'-2"
Door Thickness	2" (51mm)	2" (51mm)
Exterior Color	See chart for available colors	See chart for available colors
Custom Options ¹	1	/
Glazing	1/8" (3.2mm)	1/8" (3.2mm) or ½" Insulated Double Pane

¹Available in 1" width increments

Glazing Options	SSD-3500	SSD-3550
DSB Glass		
Single	/	✓
Insulated	N/A	✓
Tempered Glass		
Single	✓	✓
Double	N/A	✓
Obscure Glass		
Single	✓	✓
Insulated	N/A	✓
Polycarbonate Glazed	N/A	✓
Acrylic Glazed	✓ ·	✓
Aluminum Panel	✓	✓
Custom Options	N/A	✓



WARRANTIES

- 1-year Limited Warranty on materials and workmanship
- 5-year Limited Warranty on finish
- See your dealer or visit deldenmfg.com for complete warranty details





www.deldenmfg.com